



A9 ... A16 3-POLE CONTACTORS

A26-30-10




Features:

- Long service life.
- Compact modular design.
- Fully certified and highly secure.

**SIMPLY
BUY**

UL/CSA		Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
3-phase motor rating 480 V hp	General use rating 600 V AC A	V50 Hz	V60 Hz			
5	21	24	24	A9-30-10	1SBL141001R8110	0.340
				A9-30-01	1SBL141001R8101	0.340
		48	48	A9-30-10	1SBL141001R8310	0.340
				A9-30-01	1SBL141001R8301	0.340
		110	110...120	A9-30-10	1SBL141001R8410	0.340
				A9-30-01	1SBL141001R8401	0.340
		220...230	230...240	A9-30-10	1SBL141001R8010	0.340
				A9-30-01	1SBL141001R8001	0.340
7.5	25	230...240	240...260	A9-30-10	1SBL141001R8810	0.340
				A9-30-01	1SBL141001R8801	0.340
		380...400	400...415	A9-30-10	1SBL141001R8510	0.340
				A9-30-01	1SBL141001R8501	0.340
		400...415	415...440	A9-30-10	1SBL141001R8610	0.340
				A9-30-01	1SBL141001R8601	0.340
		24	24	A12-30-10	1SBL161001R8110	0.340
				A12-30-01	1SBL161001R8101	0.340
	30	48	48	A12-30-10	1SBL161001R8310	0.340
				A12-30-01	1SBL161001R8301	0.340
		110	110...120	A12-30-10	1SBL161001R8410	0.340
				A12-30-01	1SBL161001R8401	0.340
		220...230	230...240	A12-30-10	1SBL161001R8010	0.340
				A12-30-01	1SBL161001R8001	0.340
		230...240	240...260	A12-30-10	1SBL161001R8810	0.340
				A12-30-01	1SBL161001R8801	0.340
		380...400	400...415	A12-30-10	1SBL161001R8510	0.340
				A12-30-01	1SBL161001R8501	0.340
		400...415	415...440	A12-30-10	1SBL161001R8610	0.340
				A12-30-01	1SBL161001R8601	0.340
		24	24	A16-30-10	1SBL181001R8110	0.340
				A16-30-01	1SBL181001R8101	0.340
		48	48	A16-30-10	1SBL181001R8310	0.340
				A16-30-01	1SBL181001R8301	0.340
		110	110...120	A16-30-10	1SBL181001R8410	0.340
				A16-30-01	1SBL181001R8401	0.340
		220...230	230...240	A16-30-10	1SBL181001R8010	0.340
				A16-30-01	1SBL181001R8001	0.340
		230...240	240...260	A16-30-10	1SBL181001R8810	0.340
				A16-30-01	1SBL181001R8801	0.340
		380...400	400...415	A16-30-10	1SBL181001R8510	0.340
				A16-30-01	1SBL181001R8501	0.340
		400...415	415...440	A16-30-10	1SBL181001R8610	0.340
				A16-30-01	1SBL181001R8601	0.340

Main dimensions

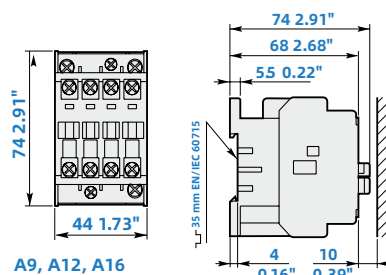

A9, A12, A16



To Order Call 186 1636 9656 or Visit <https://www.simplybuyglobal.com/>



A9 ... A16 3-POLE CONTACTORS

A40-30-10




Features:

- Stable current carrying capacity, 40A high power on/off.
- 3 main and 1 auxiliary contact configuration.
- Standard DIN rail installation.

UL/CSA		Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
3-phase motor rating 480 V hp	General use rating 600 V AC A	V50 Hz	V60 Hz			
5	21	24	24	A26-30-10	1SBL241001R8110	0.600
				A26-30-01	1SBL241001R8101	0.600
		48	48	A26-30-10	1SBL241001R8310	0.600
				A26-30-01	1SBL241001R8301	0.600
		110	110...120	A26-30-10	1SBL241001R8410	0.600
				A26-30-01	1SBL241001R8401	0.600
		220...230	230...240	A26-30-10	1SBL241001R8010	0.600
				A26-30-01	1SBL241001R8001	0.600
		230...240	240...260	A26-30-10	1SBL241001R8810	0.600
				A26-30-01	1SBL241001R8801	0.600
		380...400	400...415	A26-30-10	1SBL241001R8510	0.600
				A26-30-01	1SBL241001R8501	0.600
		400...415	415...440	A26-30-10	1SBL241001R8610	0.600
				A26-30-01	1SBL241001R8601	0.600
7.5	25	24	24	A30-30-10	1SBL281001R8110	0.710
				A30-30-01	1SBL281001R8101	0.710
		48	48	A30-30-10	1SBL281001R8310	0.710
				A30-30-01	1SBL281001R8301	0.710
		110	110...120	A30-30-10	1SBL281001R8410	0.710
				A30-30-01	1SBL281001R8401	0.710
		220...230	230...240	A30-30-10	1SBL281001R8010	0.710
				A30-30-01	1SBL281001R8001	0.710
		230...240	240...260	A30-30-10	1SBL281001R8810	0.710
				A30-30-01	1SBL281001R8801	0.710
		380...400	400...415	A30-30-10	1SBL281001R8510	0.710
				A30-30-01	1SBL281001R8501	0.710
		400...415	415...440	A30-30-10	1SBL281001R8610	0.710
				A30-30-01	1SBL281001R8601	0.710
10	30	24	24	A40-30-10	1SBL321001R8110	0.710
				A40-30-01	1SBL321001R8101	0.710
		48	48	A40-30-10	1SBL321001R8310	0.710
				A40-30-01	1SBL321001R8301	0.710
		110	110...120	A40-30-10	1SBL321001R8410	0.710
				A40-30-01	1SBL321001R8401	0.710
		220...230	230...240	A40-30-10	1SBL321001R8010	0.710
				A40-30-01	1SBL321001R8001	0.710
		230...240	240...260	A40-30-10	1SBL321001R8810	0.710
				A40-30-01	1SBL321001R8801	0.710
		380...400	400...415	A40-30-10	1SBL321001R8510	0.710
				A40-30-01	1SBL321001R8501	0.710
		400...415	415...440	A40-30-10	1SBL321001R8610	0.710
				A40-30-01	1SBL321001R8601	0.710

Main dimensions

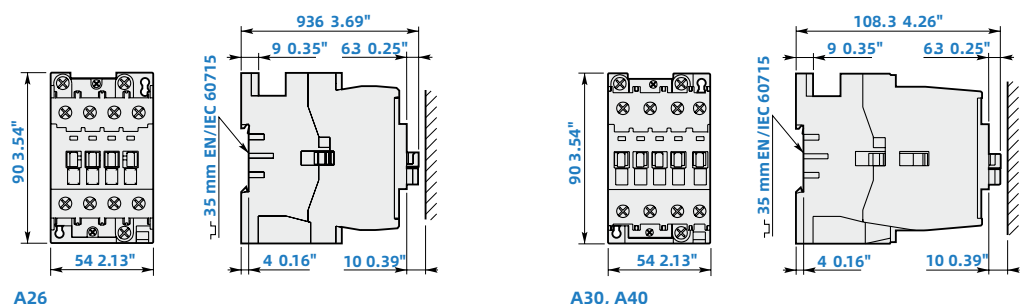



A9 ... A16 3-POLE CONTACTORS

A50-30-10




Features:

- 50A high current carrying capacity, stable on and off.
- 3 main and 1 auxiliary standard contact combination.
- Modular DIN rail quick installation, compact structure.

UL/CSA		Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
3-phase motor rating 480 V hp	General use rating 600 V AC A	V50 Hz	V60 Hz			
40	80	24	24	A50-30-11	1SBL351001R8111	1.200
		48	48	A50-30-11	1SBL351001R8311	1.200
		110	110...120	A50-30-11	1SBL351001R8411	1.200
		220...230	230...240	A50-30-11	1SBL351001R8011	1.200
		230...240	240...260	A50-30-11	1SBL351001R8811	1.200
		380...400	400...415	A50-30-11	1SBL351001R8511	1.200
		400...415	415...440	A50-30-11	1SBL351001R8611	1.200
60	90	24	24	A63-30-11	1SBL371001R8111	1.200
		48	48	A63-30-11	1SBL371001R8311	1.200
		110	110...120	A63-30-11	1SBL371001R8411	1.200
		220...230	230...240	A63-30-11	1SBL371001R8011	1.200
		230...240	240...260	A63-30-11	1SBL371001R8811	1.200
		380...400	400...415	A63-30-11	1SBL371001R8511	1.200
		400...415	415...440	A63-30-11	1SBL371001R8611	1.200
60	105	24	24	A75-30-11	1SBL411001R8111	1.200
		48	48	A75-30-11	1SBL411001R8311	1.200
		110	110...120	A75-30-11	1SBL411001R8411	1.200
		220...230	230...240	A75-30-11	1SBL411001R8011	1.200
		230...240	240...260	A75-30-11	1SBL411001R8811	1.200
		380...400	400...415	A75-30-11	1SBL411001R8511	1.200
		400...415	415...440	A75-30-11	1SBL411001R8611	1.200

Main dimensions

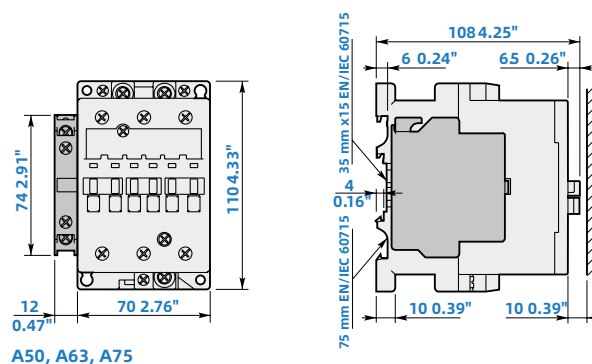



A9 ... A16 3-POLE CONTACTORS

A50-30-10




Features:


- 50A high current stable carrying capacity.
- 3 main and 1 auxiliary standard contacts.
- Modular compact structure.

UL/CSA		Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
3-phase motor rating 480 V hp	General use rating 600 V AC A	V50 Hz	V60 Hz			
60	125	24	24	A95-30-11	1SFL431001R8111	2.040
		48	48	A95-30-11	1SFL431001R8311	2.040
		110	110...120	A95-30-11	1SFL431001R8411	2.040
		220...230	230...240	A95-30-11	1SFL431001R8011	2.040
		230...240	240...260	A95-30-11	1SFL431001R8811	2.040
		380...400	400...415	A95-30-11	1SFL431001R8511	2.040
		400...415	415...440	A95-30-11	1SFL431001R8611	2.040
75	140	24	24	A110-30-11	1SFL451001R8111	2.040
		48	48	A110-30-11	1SFL451001R8311	2.040
		110	110...120	A110-30-11	1SFL451001R8411	2.040
		220...230	230...240	A110-30-11	1SFL451001R8011	2.040
		230...240	240...260	A110-30-11	1SFL451001R8811	2.040
		380...400	400...415	A110-30-11	1SFL451001R8511	2.040
		400...415	415...440	A110-30-11	1SFL451001R8611	2.040

Main dimensions

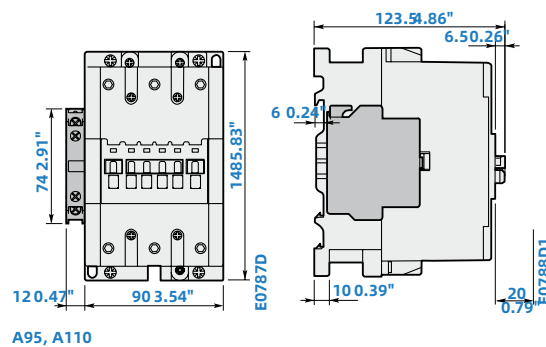

Contactor and main accessories (other accessories available)

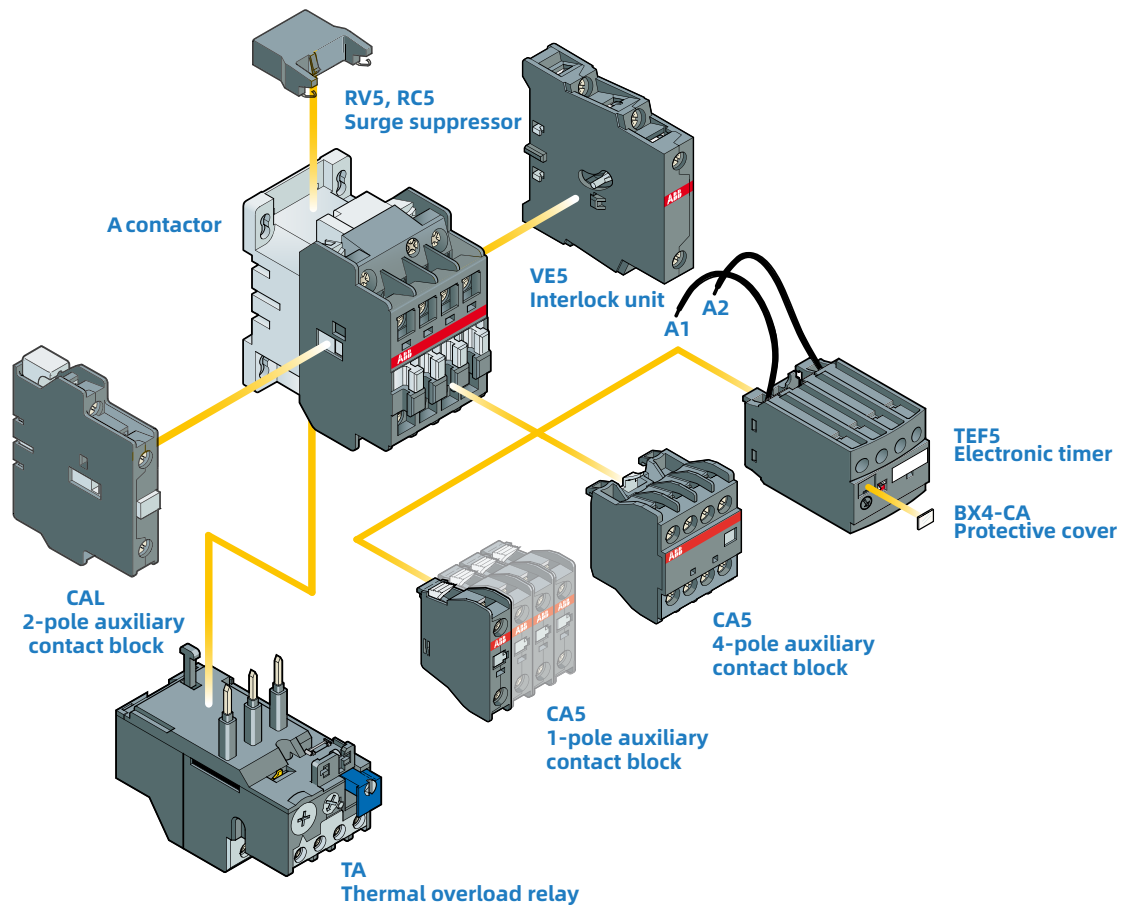



A145 ... A300 3-POLE CONTACTORS

A185-30-11




Features:


- 50A high current stable carrying capacity.
- 3 main and 1 auxiliary standard contacts.
- Modular compact structure.

UL/CSA		Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
3-phase motor rating 480 V hp	General use rating 600 V AC A	V50 Hz	V60 Hz			
100	230	24	24	A145-30-11	1SFL471001R8111	3.500
		48	48	A145-30-11	1SFL471001R8311	3.500
		110	110...120	A145-30-11	1SFL471001R8411	3.500
		220...230	230...240	A145-30-11	1SFL471001R8011	3.500
		230...240	240...260	A145-30-11	1SFL471001R8811	3.500
		380...400	400...415	A145-30-11	1SFL471001R8511	3.500
		400...415	415...440	A145-30-11	1SFL471001R8611	3.500
125	250	24	24	A185-30-11	1SFL491001R8111	3.500
		48	48	A185-30-11	1SFL491001R8311	3.500
		110	110...120	A185-30-11	1SFL491001R8411	3.500
		220...230	230...240	A185-30-11	1SFL491001R8011	3.500
		230...240	240...260	A185-30-11	1SFL491001R8811	3.500
		380...400	400...415	A185-30-11	1SFL491001R8511	3.500
		400...415	415...440	A185-30-11	1SFL491001R8611	3.500
150	300	24	24	A210-30-11	1SFL511001R8111	6.100
		48	48	A210-30-11	1SFL511001R8311	6.100
		110	110...120	A210-30-11	1SFL511001R8411	6.100
		220...230	230...240	A210-30-11	1SFL511001R8011	6.100
		230...240	240...260	A210-30-11	1SFL511001R8811	6.100
		380...400	400...415	A210-30-11	1SFL511001R8511	6.100
		400...415	415...440	A210-30-11	1SFL511001R8611	6.100
200	350	24	24	A260-30-11	1SFL531001R8111	6.100
		48	48	A260-30-11	1SFL531001R8311	6.100
		110	110...120	A260-30-11	1SFL531001R8411	6.100
		220...230	230...240	A260-30-11	1SFL531001R8011	6.100
		230...240	240...260	A260-30-11	1SFL531001R8811	6.100
		380...400	400...415	A260-30-11	1SFL531001R8511	6.100
		400...415	415...440	A260-30-11	1SFL531001R8611	6.100
250	400	24	24	A300-30-11	1SFL551001R8111	6.100
		48	48	A300-30-11	1SFL551001R8311	6.100
		110	110...120	A300-30-11	1SFL551001R8411	6.100
		220...230	230...240	A300-30-11	1SFL551001R8011	6.100
		230...240	240...260	A300-30-11	1SFL551001R8811	6.100
		380...400	400...415	A300-30-11	1SFL551001R8511	6.100
		400...415	415...440	A300-30-11	1SFL551001R8611	6.100

Main dimensions




A145, A185

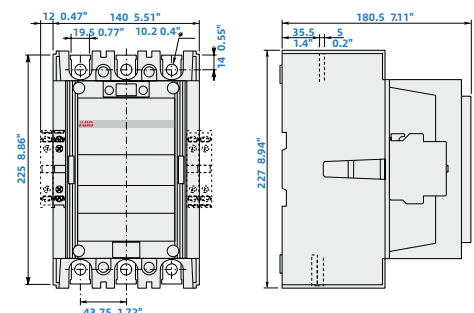

A210, A260, A300




Contactor and main accessories (other accessories available)

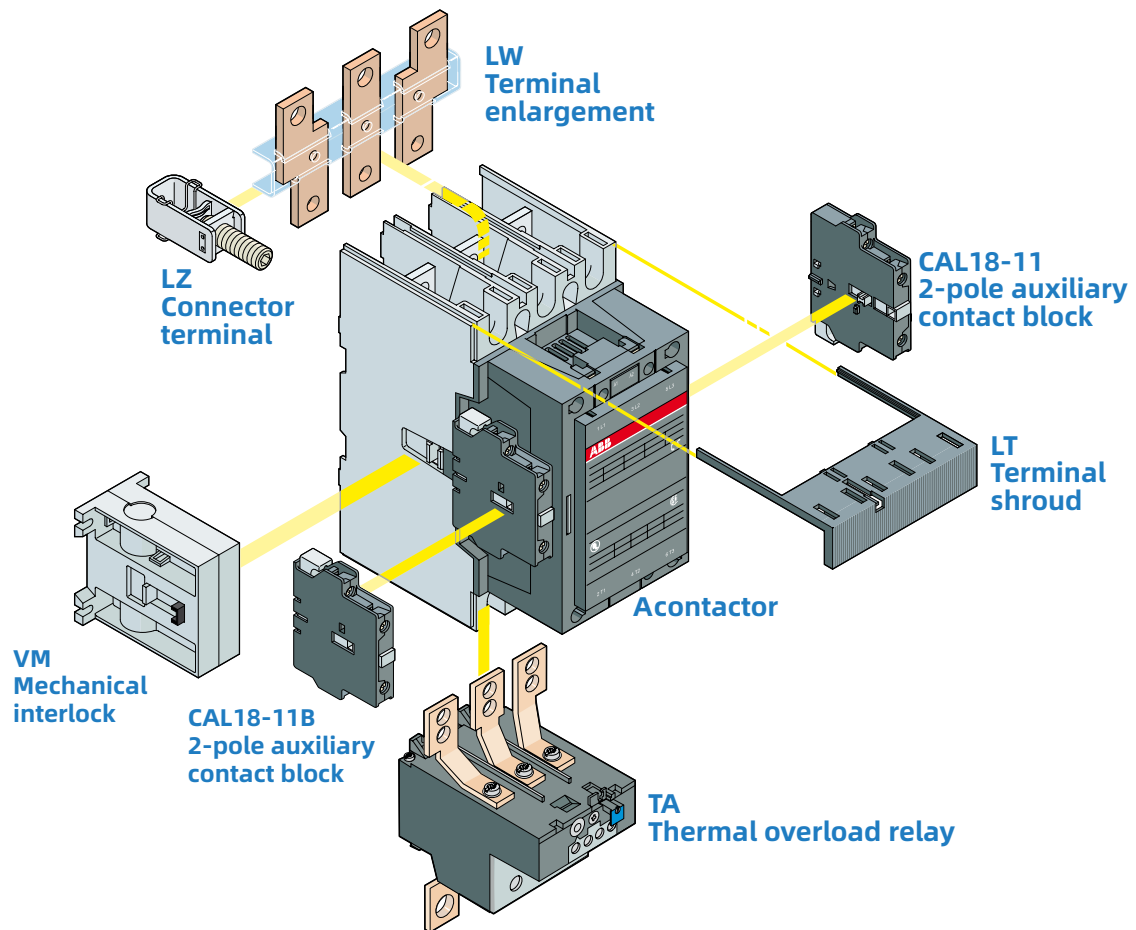



A26 4-POLE CONTACTORS

A26-40-00




Features:

- Four pole pure normally open contact, wide load adaptability.
- Durable and stable, with industrial standard quality.
- Flexible installation and convenient wiring.

**SIMPLY
BUY**

IEC	UL/CSA	Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
Rated operational current θ≤40°C AC-1 A	General use rating 600 V AC A	V50 Hz	V60 Hz			
4 N.O. main poles						
45	40	24	24	A26-40-00	1SBL241201R8100	0.610
		48	48	A26-40-00	1SBL241201R8300	0.610
		110	110...120	A26-40-00	1SBL241201R8400	0.610
		220...230	230...240	A26-40-00	1SBL241201R8000	0.610
		230...240	240...260	A26-40-00	1SBL241201R8800	0.610
		380...400	400...415	A26-40-00	1SBL241201R8500	0.610
		400...415	415...440	A26-40-00	1SBL241201R8600	0.610
2 N.O. + 2 N.C. main poles						
45	40	24	24	A26-22-00	1SBL241501R8100	0.610
		48	48	A26-22-00	1SBL241501R8300	0.610
		110	110...120	A26-22-00	1SBL241501R8400	0.610
		220...230	230...240	A26-22-00	1SBL241501R8000	0.610
		230...240	240...260	A26-22-00	1SBL241501R8800	0.610
		380...400	400...415	A26-22-00	1SBL241501R8500	0.610
		400...415	415...440	A26-22-00	1SBL241501R8600	0.610

Main dimensions

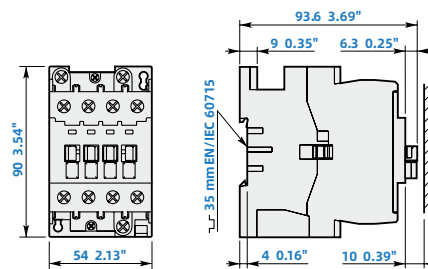

A26





A45 ... A75 4-POLE CONTACTORS

A45-40-00




Features:

- Four pole pure normally open contact, wide load adaptability.
- Durable and stable, with industrial standard quality.
- Flexible installation and convenient wiring.

**SIMPLY
BUY**

IEC	UL/CSA	Rated control circuit voltage Uc(1)		Type	Order code	Weight Pkg (1pce) kg
Rated opera- tional current 0≤40°C AC-1 A	General use rating 600 V AC A	V50 Hz	V60 Hz			
4 N.O. main poles						
	65	24	24	A45-40-00	1SBL331201R8100	1.390
		48	48	A45-40-00	1SBL331201R8300	1.390
		110	110...120	A45-40-00	1SBL331201R8400	1.390
		220...230	230...240	A45-40-00	1SBL331201R8000	1.390
		230...240	240...260	A45-40-00	1SBL331201R8800	1.390
		380...400	400...415	A45-40-00	1SBL331201R8500	1.390
		400...415	415...440	A45-40-00	1SBL331201R8600	1.390
	80	24	24	A50-40-00	1SBL351201R8100	1.390
		48	48	A50-40-00	1SBL351201R8300	1.390
		110	110...120	A50-40-00	1SBL351201R8400	1.390
		220...230	230...240	A50-40-00	1SBL351201R8000	1.390
		230...240	240...260	A50-40-00	1SBL351201R8800	1.390
		380...400	400...415	A50-40-00	1SBL351201R8500	1.390
		400...415	415...440	A50-40-00	1SBL351201R8600	1.390
	105	24	24	A75-40-00	1SBL411201R8100	1.390
		48	48	A75-40-00	1SBL411201R8300	1.390
		110	110...120	A75-40-00	1SBL411201R8400	1.390
		220...230	230...240	A75-40-00	1SBL411201R8000	1.390
		230...240	240...260	A75-40-00	1SBL411201R8800	1.390
		380...400	400...415	A75-40-00	1SBL411201R8500	1.390
		400...415	415...440	A75-40-00	1SBL411201R8600	1.390
2 N.O. + 2 N.C. main poles						
70	60	24	24	A45-22-00	1SBL331501R8100	1.400
		48	48	A45-22-00	1SBL331501R8300	1.400
		110	110...120	A45-22-00	1SBL331501R8400	1.400
		220...230	230...240	A45-22-00	1SBL331501R8000	1.400
		230...240	240...260	A45-22-00	1SBL331501R8800	1.400
		380...400	400...415	A45-22-00	1SBL331501R8500	1.400
		400...415	415...440	A45-22-00	1SBL331501R8600	1.400
125	105	24	24	A75-22-00	1SBL411501R8100	1.400
		48	48	A75-22-00	1SBL411501R8300	1.400
		110	110...120	A75-22-00	1SBL411501R8400	1.400
		220...230	230...240	A75-22-00	1SBL411501R8000	1.400
		230...240	240...260	A75-22-00	1SBL411501R8800	1.400
		380...400	400...415	A75-22-00	1SBL411501R8500	1.400
		400...415	415...440	A75-22-00	1SBL411501R8600	1.400

Main dimensions

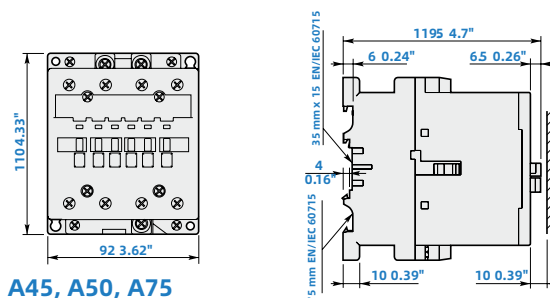

A45, A50, A75

